


**PECO Part
#990023**

MFG:



The Most
Helpful Brand
In Car Washing

UNDERCARRIAGE MANIFOLD (W/NOZZLES)



Specifications

Water Requirements

Total System WATER Requirements:

13.50	GPM @ 40psi Reclaim Water
0.00	GPM @ 40psi Fresh Water
0.00	GPM Soft Water
0.00	GPM Hot Water
0.00	GPM RO Water
0.00	GPM @ 850psi Reclaim Water
0.00	GPM @ 850psi High Pressure Water

Water Controls Requirements

Total System Water Control Requirements:

- 0 Solution Induction Pump (SIP)
- 0 1/2" Fresh Water Valve (1/2SOL)
- 0 3/4" Fresh Water Valve (3/4SOL)
- 0 1" Fresh Water Valve (1SOL)
- 1 3/4" Clay Valve (3/4CV)
- 0 1" Clay Valve (1CV)
- 0 1 1/2" Clay Valve (1.5CV)
- 0 1/2" High Pressure Valve (hpSOL)

UNDERCARRIAGE MANIFOLD

Equipment Specification

Technical Data: UNDERCARRIAGE MANIFOLD

Construction: Stainless Steel sub-floor manifold

Tunnel Length: 30.25" (0.76 m)

Tunnel Height: 2.5" (0.05 m)

Tunnel Width: 32" (.81 m)

Vehicle Height Clearance: n/a

Water Flow: 18 gpm @ 40 psi (68.1 lpm @ .3 Mpa)

Electrical Requirements: n/a

Hydraulic Requirements: n/a

Air Requirements: n/a


Shipping Weight: 25 lbs. (12 kg)

Controller Functions: 1 (Manifold On)

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**

05/30/13 S:\Engineering Doc's\WEB EQUIPMENT SPEC FILES\ARCHES & APPLICATORS\990023 UNDERCARRIAGE MANIFOLD EQSPEC.doc

UNDERCARRIAGE MANIFOLD

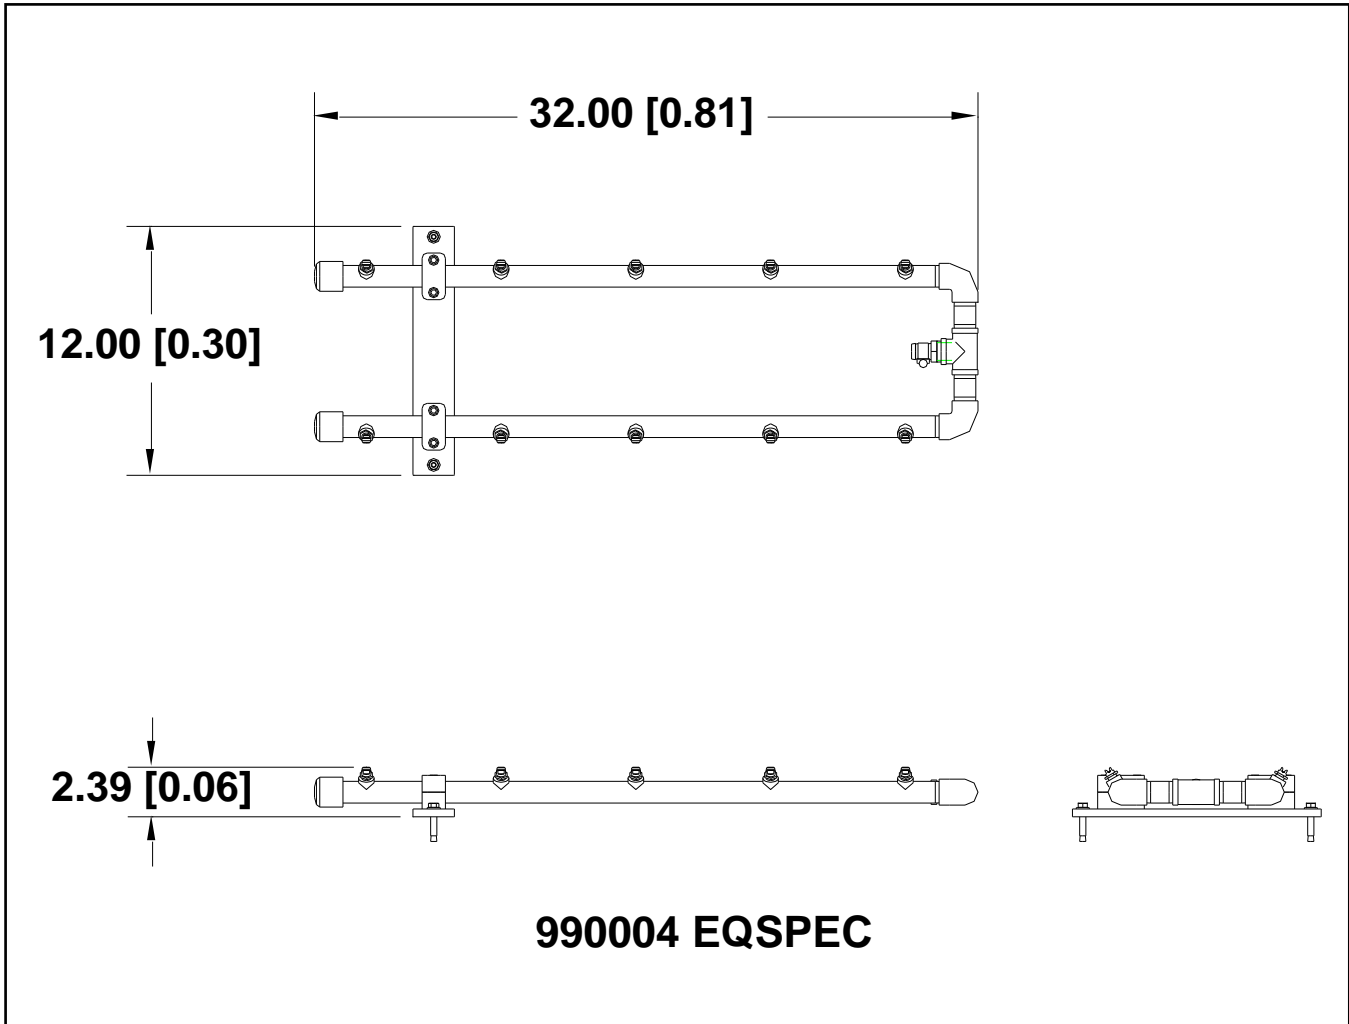

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**

05/30/13 S:\Engineering Doc's\WEB EQUIPMENT SPEC FILES\ARCHES & APPLICATORS\990023 UNDERCARRIAGE MANIFOLD EQSPEC.doc