PECO Part #990096



The Most Helpful Brand In Car Washing

MFG:

RET UFWP FRONT WHEEL PULL (PER FOOT) (INSIDE RAIL 4-3/4" HE



Description

This option is required if you are going to use your conveyor as a front wheel pull application. Front wheel pull requires that we add additional height to the inside guide rail. If this option is ordered, PECO will add a piece of 3/4 x 3/4 square tubing to the inside guide rail. The extra height of 4 3/4" will insure that the front tire is less likely to twist on the conveyor, thus preventing vehicles from jumping the conveyor track. Also, the track width is reduced to 12". Note: Front wheel pull is not recommended for conveyors over 90' in length.

Specifications

PECO ULTIMATE CONVEYOR

Equipment Specification

Technical Data: CONVEYOR SECTIONS

Construction: Painted Steel Frame

Trench Length: Conveyor Length +1'-0"

Shelf Depth: 1'-7 1/4" (0.49 m) min. for Rear Wheel Push

1'-8 1/2" (0.52 m) min. for Front Wheel Pull

Shelf Width: 19" Typical

Trench Width: 48"

Vehicle Height Clearance: n/a

Water Output: 10 gpm to Chain & Roller Flush Manifold

Electrical Requirements: 24 or 120 VAC (for 4WI Roller Up) (0.63 amp / 0.13 amp)

Hydraulic Requirements: 10 gpm @ 1000 psi (37.9 lpm @ 6.9 Mpa)


Air Requirements: 20 to 30 psi for 4WI Roller Up and Hydraulic Take-Up Assist

Shipping Weight: Entrance Section 925 lbs. (420 kg)

5' Center Section 375 lbs. (170 kg) 10' Center Section 750 lbs. (341 kg) Exit Section 975 lbs. (443 kg)


Controller Function: 2 (Hydraulics On / Roller Up)

PECO ULTIMATE CONVEYOR

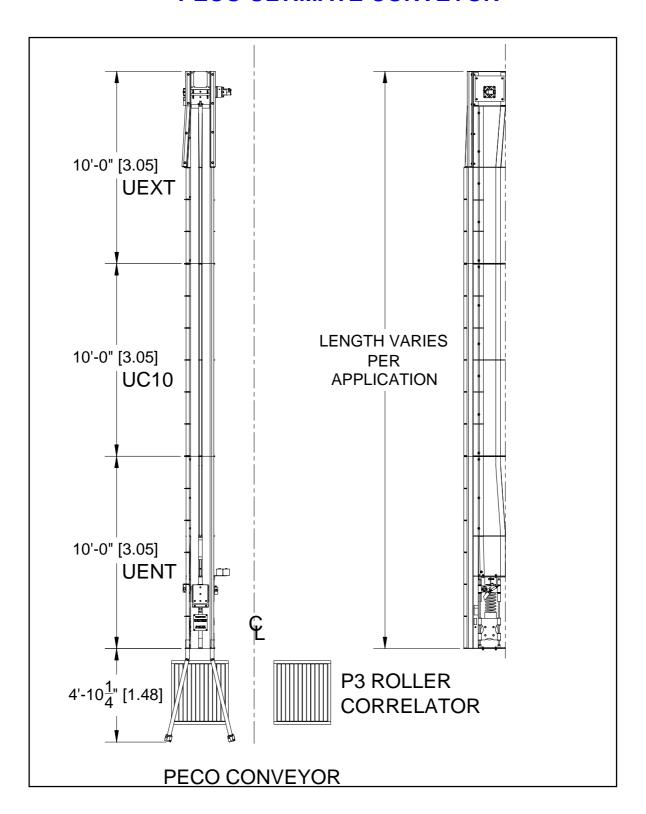

PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA – 1-248-299-5800

PECO ULTIMATE CONVEYOR

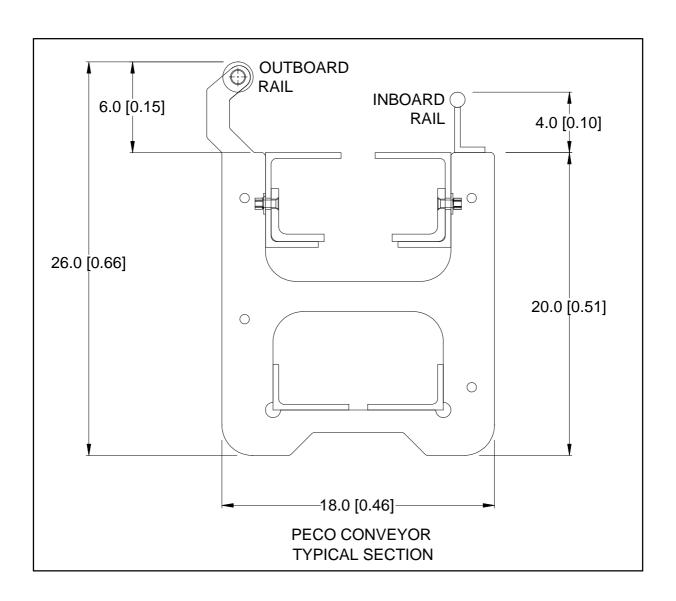

PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA – 1-248-299-5800