

PECO Part #990509

MFG:



The Most
Helpful Brand
In Car Washing

PE111s LOW VOLUME ARCH 11-NOZZLES SS



Description

Equipment Description:

The **PE111 Stainless Steel Low Volume Arch** is designed to deliver liquid to the vehicle surface. Operating at a maximum pressure of 250 psi with the ability to deliver 1 ½ gpm to 15 gpm. Typical uses are rinse arches and spot free rinse arches. This arch features all Stainless Steel 3 ½" round tubing and **round radius curved design**.

Specifications

Water Requirements

Total System WATER Requirements:

- 0.00 GPM @ 40psi Reclaim Water
- 11.00 GPM @ 40psi Fresh Water
- 0.00 GPM Soft Water
- 0.00 GPM Hot Water
- 0.00 GPM RO Water
- 0.00 GPM @ 850psi Reclaim Water
- 0.00 GPM @ 850psi High Pressure Water

PE111 Low Pressure Arch

Equipment Specification

Technical Data: PE111

Construction: Stainless Steel Structure

Tunnel Space: 8" (.20 m)

Tunnel Height: 100.19" (2.5 m)

Tunnel Width: 125.5" (3.2 m)

Vehicle Height Clearance: 91" (2.31 m)

Water Output: 11 gpm standard, ½" NPT Port. Flow rate based on standard nozzle configuration.

Electrical Requirements: n/a

Hydraulic Requirements: n/a


Air Requirements: n/a

Shipping Weight: 190 lbs. (87 kg)

Controller Function: 1 (Arch On)

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**

PE111 Low Pressure Arch

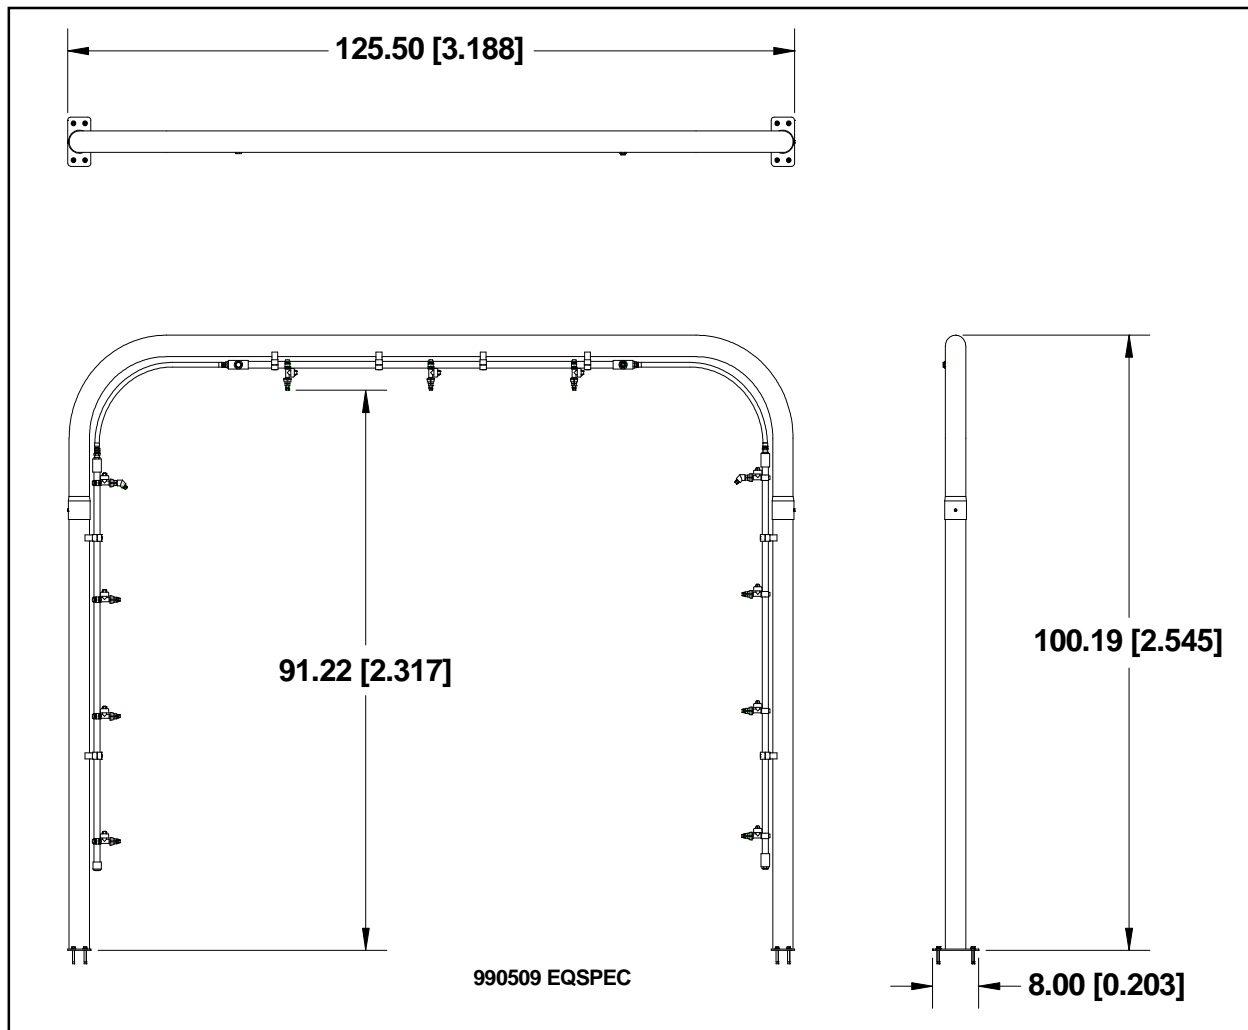

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**