

PECO Part #992055

MFG:



The Most
Helpful Brand
In Car Washing

BPMAN BUMPER PREP MANIFOLD



Description

This unit applies presoak or bug cleaners to the front or rear of vehicles through a stainless steel manifold with (5) 6504 Veejet nozzles. It is mounting on the floor. This unit requires a pumping station or injection system.

Specifications

Water Requirements

Total System WATER Requirements:

- 0.00 GPM @ 40psi Reclaim Water
- 2.00 GPM @ 40psi Fresh Water
- 0.00 GPM Soft Water
- 0.00 GPM Hot Water
- 0.00 GPM RO Water
- 0.00 GPM @ 850psi Reclaim Water
- 0.00 GPM @ 850psi High Pressure Water

Water Controls Requirements

Total System Water Control Requirements:

- 1 Solution Induction Pump (SIP)
- 0 1/2" Fresh Water Valve (1/2SOL)
- 0 3/4" Fresh Water Valve (3/4SOL)
- 0 1" Fresh Water Valve (1SOL)
- 0 3/4" Clay Valve (3/4CV)
- 0 1" Clay Valve (1CV)
- 0 1 1/2" Clay Valve (1.5CV)
- 0 1/2" High Pressure Valve (hpSOL)

BPMAN BUMPER PREP MANIFOLD

Equipment Specification

Technical Data: BPMAN

Construction: Stainless Steel sub-floor manifold / Aluminum Mounting Plate

Tunnel Length: 4" (0.11 m)

Tunnel Height: 2.6" (0.05 m)

Tunnel Width: 32" (.81 m)

Vehicle Height Clearance: n/a

Water Output: 3 gpm (11.3 lpm) per Manifold Set

Electrical Requirements: n/a

Hydraulic Requirements: n/a


Air Requirements: n/a

Shipping Weight: 10 lbs. (5 kg)

Controller Functions: 1 (Manifold On)

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**

BPMAN BUMPER PREP MANIFOLD

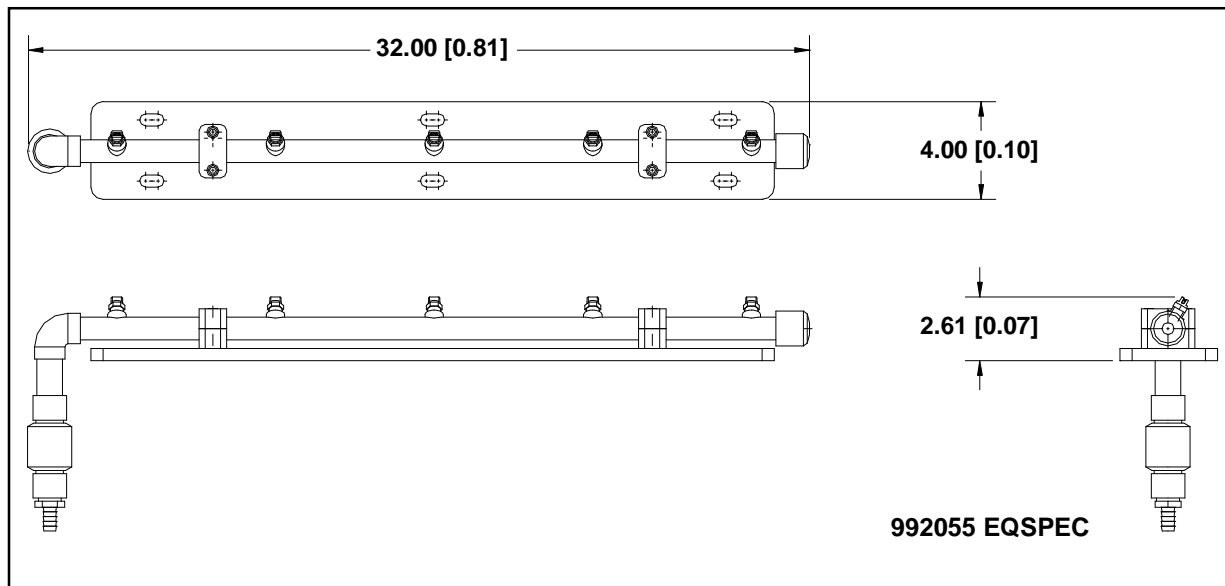

**PECO Corporation – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA –
1-248-299-5800**