

PECO Part #997050

MFG:PECO
MFG#:DS30-10-
1SS



The Most
Helpful Brand
In Car Washing

RET DS30-10-1ss DRYER SYSTEM 30HP SS STRUCTURE 10HP
PRODUCE



Description

Special Price

Specifications

Electrical Three Phase Requirements

21.33 Kilowatts Usage 3 Starters *including Overloads*

86.25	Total AMPs = 208vac @ 60Hz	47.21	Total AMPs = 380vac @ 50Hz
78.00	Total AMPs = 230vac @ 60Hz	44.85	Total AMPs = 400vac @ 50Hz
39.00	Total AMPs = 460vac @ 60Hz	43.23	Total AMPs = 415vac @ 50Hz
31.20	Total AMPs = 575vac @ 60Hz		

D30s/D30g 30 H.P. Dryer System

Equipment Specification

Technical Data: D30s/D30g

Construction: Stainless Steel or Galvanized Steel Structure

Tunnel Space: 58" (1.47 m)

Tunnel Height: 133" (3.37 m)

Tunnel Width: 150" (3.81 m)

Vehicle Height Clearance: 91" (2.31 m)

Air Flow: 3950 cfm per unit

Electrical Requirements: 10 HP 3-phase 208/230/460/575 VAC (28/26/13/9.2 amps)
(3) Motors

Hydraulic Requirements: n/a

Air Requirements: n/a


Shipping Weight: lbs. (kg)

Controller Function: 3 (Dryers 1, 2, 3 On)

Ambient Temperature: 125°F (51°C) Maximum

**PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 –
USA – 1-248-299-5800**

D30s/D30g 30 H.P. Dryer System

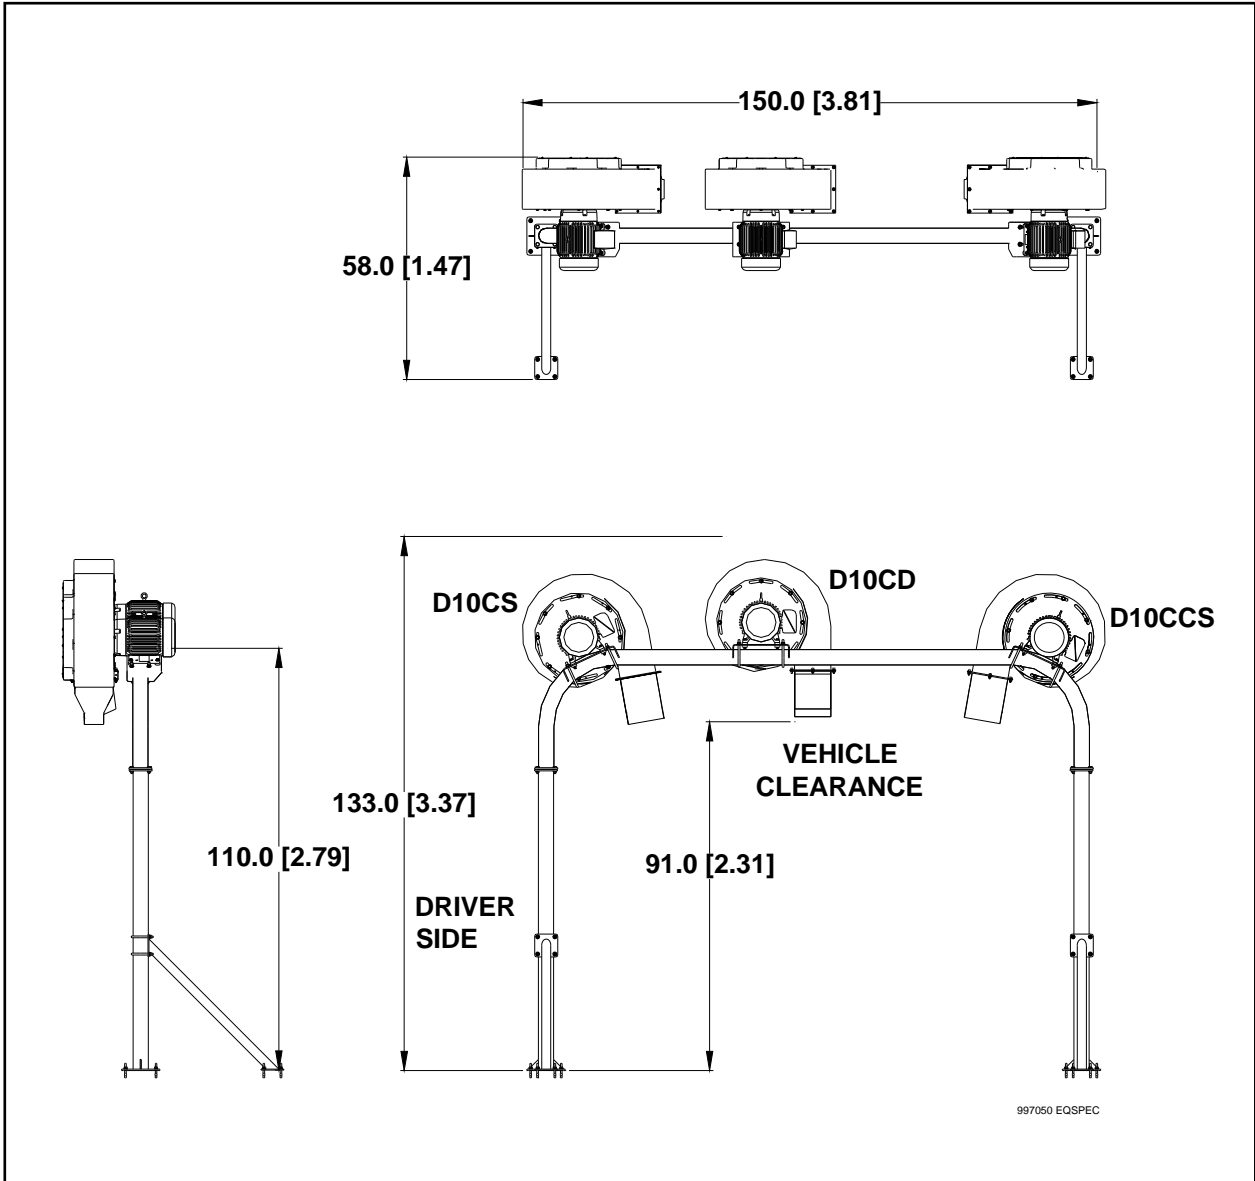

PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA – 1-248-299-5800