PECO Part #990028



The Most Helpful Brand In Car Washing

MFG:

PE030 LOW PRESSURE/VOLUME PUMP STATION PNEUMATIC 5GPM W/24V









Description

The **PE030 Low Pressure/Volume Pumping Station** Pneumatic is designed to deliver 5 gpm @ 100 psi . This pump features a Santoprene diaphragm design which is capable of pumping mixed solution with fresh water to a piece of equipment. Unit comes standard with a 1/4" air solenoid with air filter. Typical uses are tire applicators, soap foamers, presoaks and drying agents. This unit requires compressed air to be powered.

Specifications

Electrical Single Phase Requirements

Total System Electrical Single Phase Requirements:

0.42AMPs @ 24vac 0AMPs @ 120vac 0AMPs @ 220vac

Equipment Specification

Technical Data: PE030

Construction: Stainless Steel Frame

Length: 21.0" (0.53 m)

Height: 36.88" (0.94 m)

Width: 9.44" (0.24 m)

Vehicle Height Clearance: n/a

Water Input: 1/2" Line at 40 psi (0.3 Mpa)

Water Output: 5 gpm @ 100 psi (18.9 lpm @ 0.68 MPa)


Electrical Requirements: 24/120 VAC (.42 amp / .09 amp)

Hydraulic Requirements: n/a

Air Requirements: 1/2" Line at 40 psi (0.3 Mpa)

Shipping Weight: 23 lbs. (11 kg)

Controller Function: 1 (Pump On)

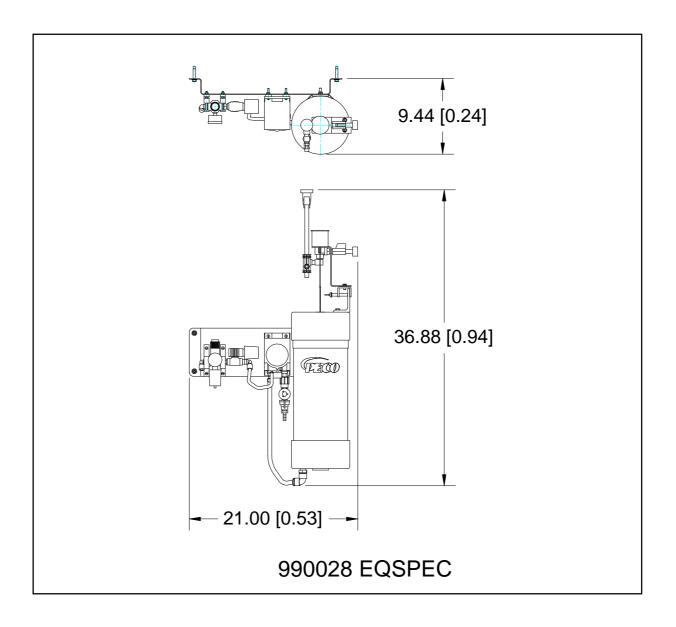

Equipment Specification

Technical Data: PE030

Construction: Stainless Steel Frame

Length: 21.0" (0.53 m)

Height: 36.88" (0.94 m)

Width: 9.44" (0.24 m)

Vehicle Height Clearance: n/a

Water Input: 1/2" Line at 40 psi (0.3 Mpa)

Water Output: 5 gpm @ 100 psi (18.9 lpm @ 0.68 MPa)

Electrical Requirements: 24/120 VAC (.42 amp / .09 amp)

Hydraulic Requirements: n/a

Air Requirements: 1/2" Line at 40 psi (0.3 Mpa)

Shipping Weight: 23 lbs. (11 kg)

Controller Function: 1 (Pump On)

