


PECO Part #990028b

MFG:



The Most
Helpful Brand
In Car Washing

PE030b LOW PRESSURE/VOLUME PUMP STATION PNEUMATIC 5GPM 120V

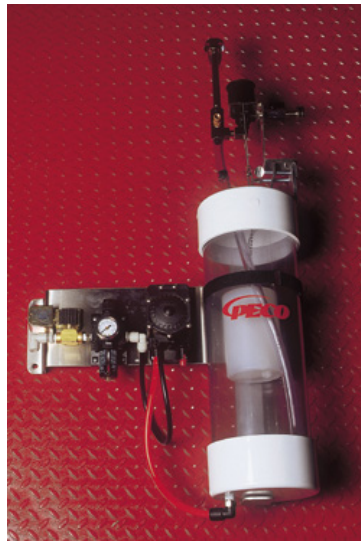

Description

The PE030 Low Pressure/Volume Pumping Station Pneumatic is designed to deliver 5 gpm @ 100 psi . This pump features a Santoprene diaphragm design which is capable of pumping mixed solution with fresh water to a piece of equipment. Unit comes standard with a 1/4" air solenoid with air filter. Typical uses are tire applicators, soap foamers, presoaks and drying agents. This unit requires compressed air to be powered.

Specifications

Electrical Single Phase Requirements

Total System Electrical Single Phase Requirements:
0AMPs @ 24vac
0.08AMPs @ 120vac
0AMPs @ 220vac

PE030 Low Volume Pumping Station Pneumatic

Equipment Specification

Technical Data: PE030

Construction: Stainless Steel Frame

Length: 21.0" (0.53 m)

Height: 36.88" (0.94 m)

Width: 9.44" (0.24 m)

Vehicle Height Clearance: n/a

Water Input: 1/2" Line at 40 psi (0.3 Mpa)

Water Output: 5 gpm @ 100 psi (18.9 lpm @ 0.68 MPa)

Electrical Requirements: 24/120 VAC (.42 amp / .09 amp)

Hydraulic Requirements: n/a


Air Requirements: 1/2" Line at 40 psi (0.3 Mpa)

Shipping Weight: 23 lbs. (11 kg)

Controller Function: 1 (Pump On)

**PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 –
USA – 1-248-299-5800**

PE030 Low Volume Pumping Station Pneumatic

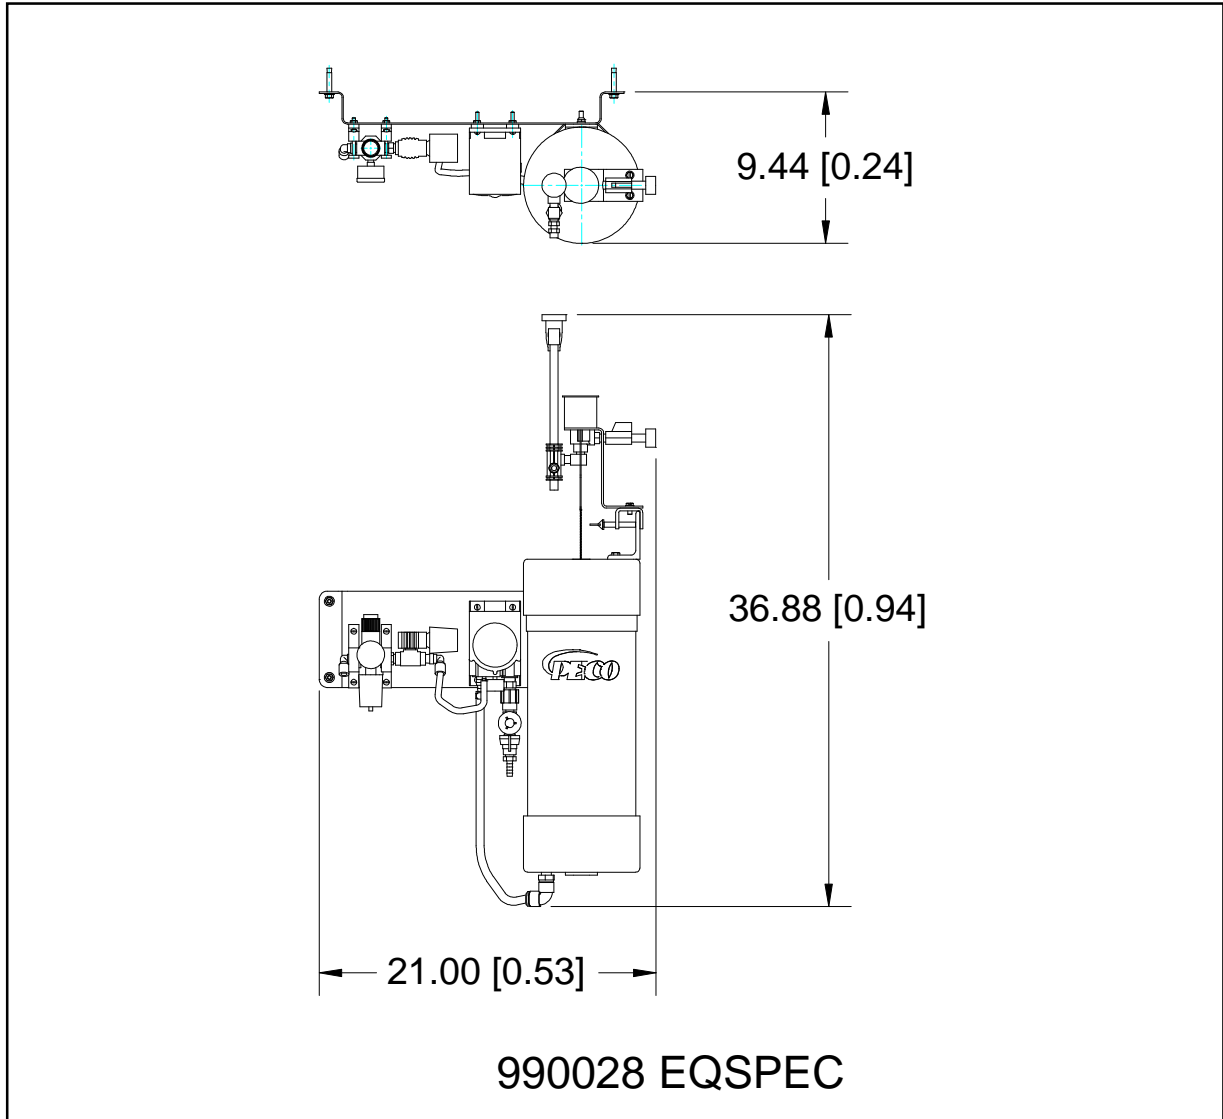

**PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 –
USA – 1-248-299-5800**