


PECO Part #990115

MFG:



The Most
Helpful Brand
In Car Washing

BANK5 HYDRAULIC PROPORTIONATOR 5-BANK UNIT

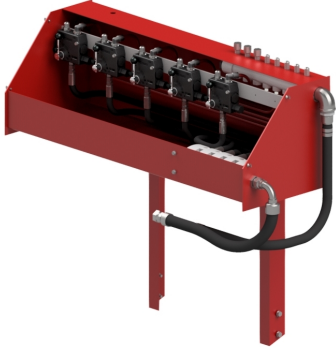

Description

This option allows you to have one central hydraulic supply unit. That central hydraulic supply unit supports the hydraulic proportionator banks. You can design a system with three to six proportionator banks. These banks will support individual pieces of equipment within the tunnel.

Specifications

HYDRAULIC PROPORTIONATOR 5-BANK

Equipment Specification

Technical Data: 5-BANK

Construction: Painted Steel Unit

Length: 53.4" (1.35 m)

Height: 42.5" (1.07 m)

Width: 20" (0.50 m)

Vehicle Height Clearance: n/a

Water Input: n/a

Water Output: n/a

Electrical Requirements: N/A

Hydraulic Delivery: P21: 3 gpm @ 1000 psi (11.3 lpm @ 6.9 MPa) PER BANK
P23: 6 gpm @ 1000 psi (22.6 lpm @ 6.9 MPa) PER BANK
P25: 10 gpm @ 1000 psi (37.6 lpm @ 6.9 MPa) PER BANK

Hydraulic Requirements: n/a


Air Requirements: n/a

Shipping Weight: 250 lbs. (113 kg)

Controller Function: N/A

**PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 –
USA – 1-248-299-5800**

HYDRAULIC PROPORTIONATOR 5-BANK

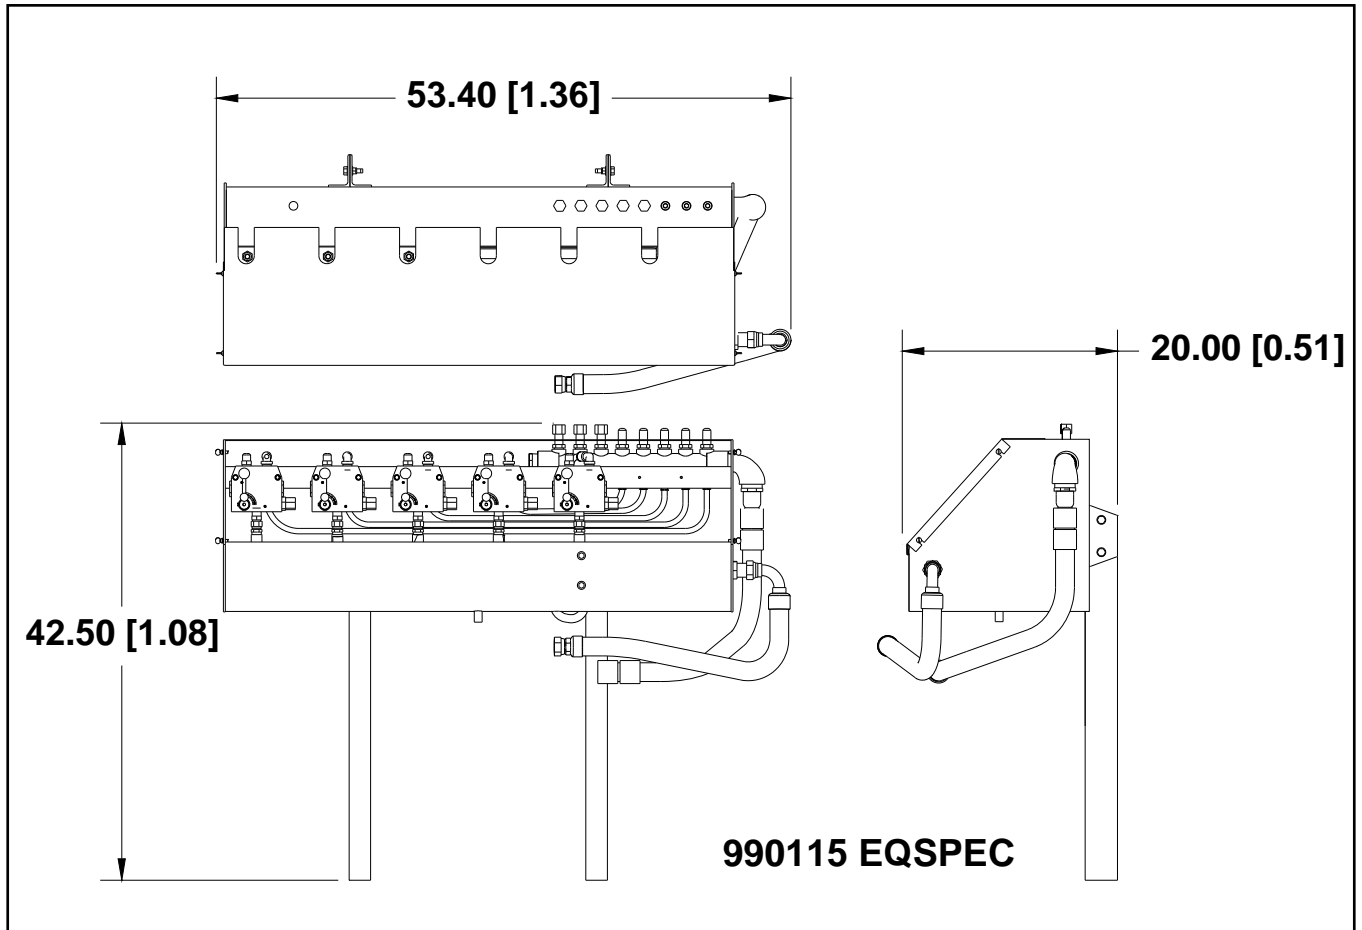

**PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 –
USA – 1-248-299-5800**