PECO Part #990057





The Most Helpful Brand In Car Washing

RET PE101s DELUXE DISPLAY FOAM ARCH SS





Description

Equipment Description:

The **PE101** Stainless Steel Deluxe Display Foam Arch is designed to deliver soap foamed liquid to the vehicle surface. This arch applies the soap foam similar to spray painting; this allows an even coverage film of soap applied to the vehicle surface. This type of coverage has two benefits; First, the foamed soap covers every inch of the vehicle surface. Second, it conserves the soap product by only applying the right amount. Typical uses are soap foamer arches and wax soap foamer arches. This arch features all Stainless Steel 3 ½" round tubing and **round** radius curved design. A Pumping station is required.

Specifications

Pneumatic Control Requirements

Total System Pneumatic Control Requirements:

4.00 CFM

1.00 2W1 2-Way Valve

0.00 3W1 3-Way Valve

0.00 4W1 4-Way Valve

0.00 4WM 4-Way Valve Manual

Water Requirements

Total System WATER Requirements:

0.00 GPM @ 40psi Reclaim Water

2.00 GPM @ 40psi Fresh Water

0.00 GPM Soft Water

0.00 GPM Hot Water

0.00 GPM RO Water

0.00 GPM @ 850psi Reclaim Water

0.00 GPM @ 850psi High Pressure Water

Water Controls Requirements

Total System Water Control Requirements:

1 Solution Induction Pump (SIP)

0 1/2" Fresh Water Valve (1/2SOL)

0 3/4" Fresh Water Valve (3/4SOL)

0 1" Fresh Water Valve (1SOL)

0 3/4" Clay Valve (3/4CV)

0 1" Clay Valve (1CV)

0 1 1/2" Clay Valve (1.5CV)

0 1/2" High Pressure Valve (hpSOL)

PE101 Deluxe Display Foam Arch

Equipment Specification

Technical Data: PE101

Construction: Stainless Steel Structure

Tunnel Space: 8" (.20 m)

Tunnel Height: 100.19" (2.5 m)

Tunnel Width: 125.5" (3.2 m)

Vehicle Height Clearance: 92" (2.33 m)

Water Output: 3 gpm.

Electrical Requirements: n/a


Hydraulic Requirements: n/a

Air Requirements: 6912 cu. In. (113.27 L.)

Shipping Weight: 190 lbs. (87 kg)

Controller Function: 1 (Arch On)

PE101 Deluxe Display Foam Arch

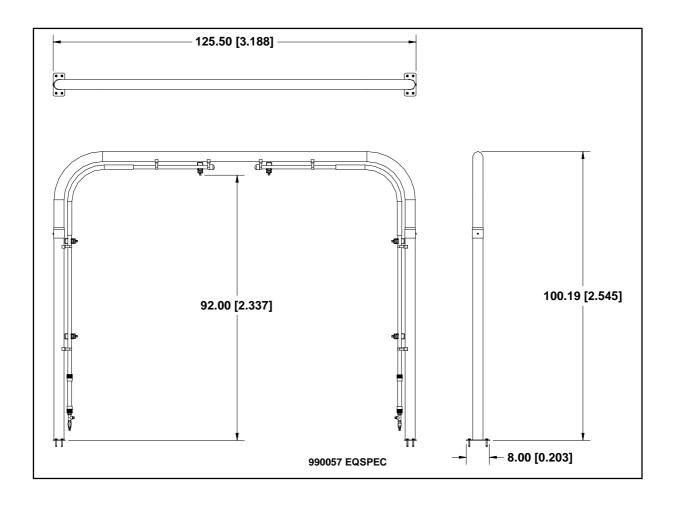

PECO Car Wash Systems – 244 Rex Boulevard – Auburn Hills – Michigan – 48326 – USA – 1-248-299-5800